

# TouchCore360L-QF16IP

## *Capacitive Touch Sensor Controller*

---

*CORERIVER Semiconductor reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time.*

- ◆ *To discontinue any product or service, CORERIVER should inform customers of that before 3 months through its homepage.*
- ◆ *Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.*
- ◆ *The CORERIVER Semiconductor products listed in this document are intended for usage in general electronics applications. These CORERIVER Semiconductor products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury.*

**Copyright CORERIVER Semiconductor Co., Ltd. 2012**

**All Rights Reserved**

# 1 TouchCore360L-QF16IP Overview

## 1.1 General Description

**TouchCore360L-QF16IP** is a high-performance Controller for capacitive touch keys. Its engine is an 8-bit 80C51 compatible Processor.

**TouchCore360L-QF16IP** has three timer/counters, maximum 7 channels of touch sensors, maximum 10 programmable I/O pins, 1 Watchdog timer, POR (Power-On Reset), UART, I2C, and LVD (Low Voltage Detector) as peripherals. In addition, it contains an internal ring oscillator, which can generate the 48 MHz system clock signal instead of a crystal oscillator.

**TouchCore360L-QF16IP** has its own architecture for fast sensing. With the hardware filter, it provides noise immunity and excellent sensitivity. The firmware algorithm supports smart sensitivity and compensates for changes in the sensitivity due to environmental factors such as temperature and humidity.

To effectively manage power, **TouchCore360L-QF16IP** enables low power consumption by using scan interval and clock control methods after last touch.

**TouchCore360L-QF16IP** operates over the extended -40°C to +125°C temperature range, and is available in the 3mm x 3mm, 0.55T, 16-pin QFN package.

## 1.2 Features

- ◆ Capacitive touch key controller
  - Supports up to 7 single-type touch keys
  - Supports scroll bar-type touch keys
  - Supports wheel-type touch keys
- ◆ Response Time
  - Initial latency of < 20ms for first touch, subject to configuration
  - Programmable sensing rate for power saving.
- ◆ CPU
  - 8-bit Turbo 80C52 Architecture

- 4 Cycles / 1 Machine Cycle
- Instruction Level Compatible with Intel 80C52
- ◆ Memory
  - 12KB Flash
  - 1KB User EEPROM
  - 512B Internal Aux. RAM
  - 256B Internal RAM
- ◆ Power Supply
  - Operating Voltage : +1.8V to +3.6V
- ◆ Operating Frequency: Max. 48MHz(@3.3V), 16MHz(@2.0V)
- ◆ 10 Programmable I/O Pins
- ◆ Communication interfaces
  - 1-channel I2C Communication (Master/Slave)
  - 1-channel UART Communication
- ◆ Internal Ring OSC with Calibration function
- ◆ Supporting ISP/IAP/MDS
- ◆ 7 Internal Interrupt Sources and 3 External Interrupt Sources
- ◆ 4 Reset Sources
- ◆ Power Down Wake-up Sources
  - Reset Sources + 3 External Interrupt (Both Levels)
  - Watchdog Timer Interrupt
- ◆ 3 Operating modes : Active, Sleep, Deep Sleep
- ◆ E.S.D. Protection up to
  - 8,000V
- ◆ Latch-up Protection Up to  $\pm 200\text{mA}$
- ◆ Package
  - 16-QFN (3mm X 3mm, 0.55T)

### 1.3 Applications

- ◆ Home appliance: TV, Monitor, Home Theater
- ◆ Mobile Phones
- ◆ Portable MP3, MP4
- ◆ Digital Cameras
- ◆ Battery power applications


## 1.4 Product Family Guide

Product	Res.	FLASH [Byte]	EEPROM [Byte]	RAM [Byte]	Volt [V]	Freq [MHz]	T/C [16 bits]	COM I/O	WDT	PWM (bit X ch)	I/O Pins	Touch Channel	Package	Others
TouchCore360L- QF16IP	65,536	12K	1K	512 + 256	1.8 ~ 3.6	48	3	1 UART 1 I2C	1	8 X 3	10	7	16-QFN (3x3, 0.55T)	IAP ISP EJTAG LVR POR RING


## 2 Block Diagram

Figure shows the block diagram of **TouchCore360L-QF16IP**. Programs reside in the internal program memory (Embedded Flash Memory). Data are read from or written to data memory (SRAM) or special function registers (SFRs).

The internal registers of **TouchCore360L-QF16IP** are configured as part of the on-chip RAM: therefore each register has an address. This is reasonable for **TouchCore360L-QF16IP**, since it has so many registers.

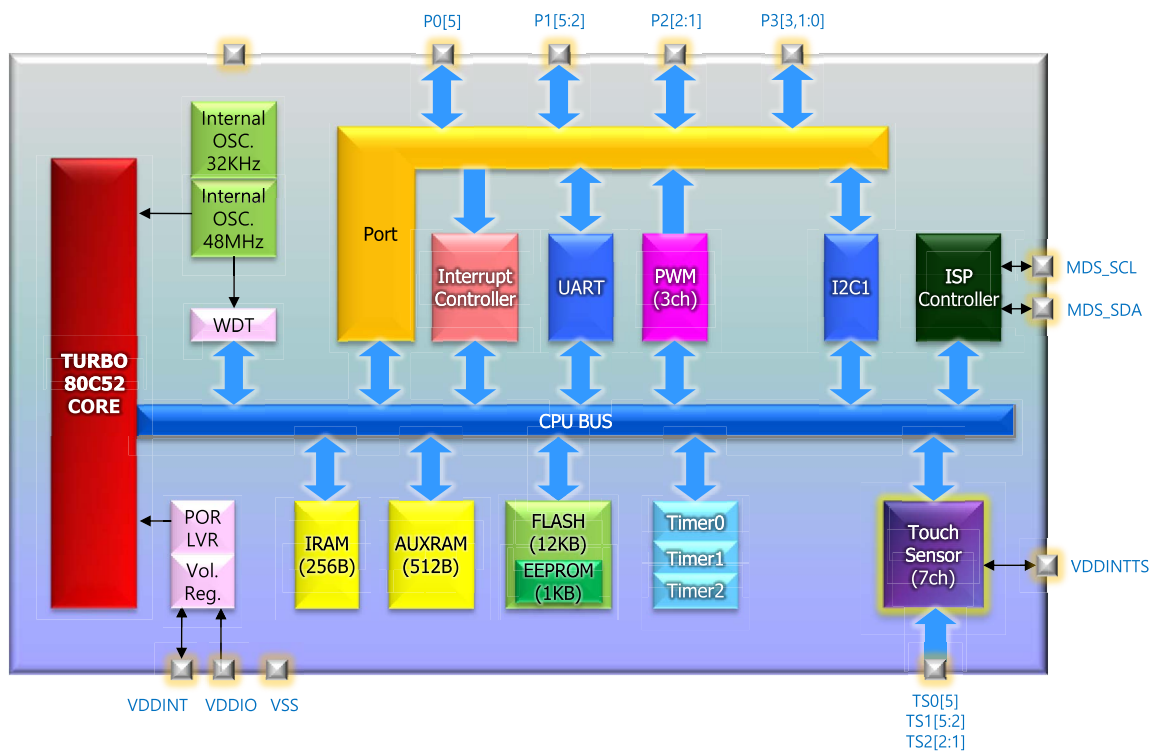

### 3 Pin Configuration

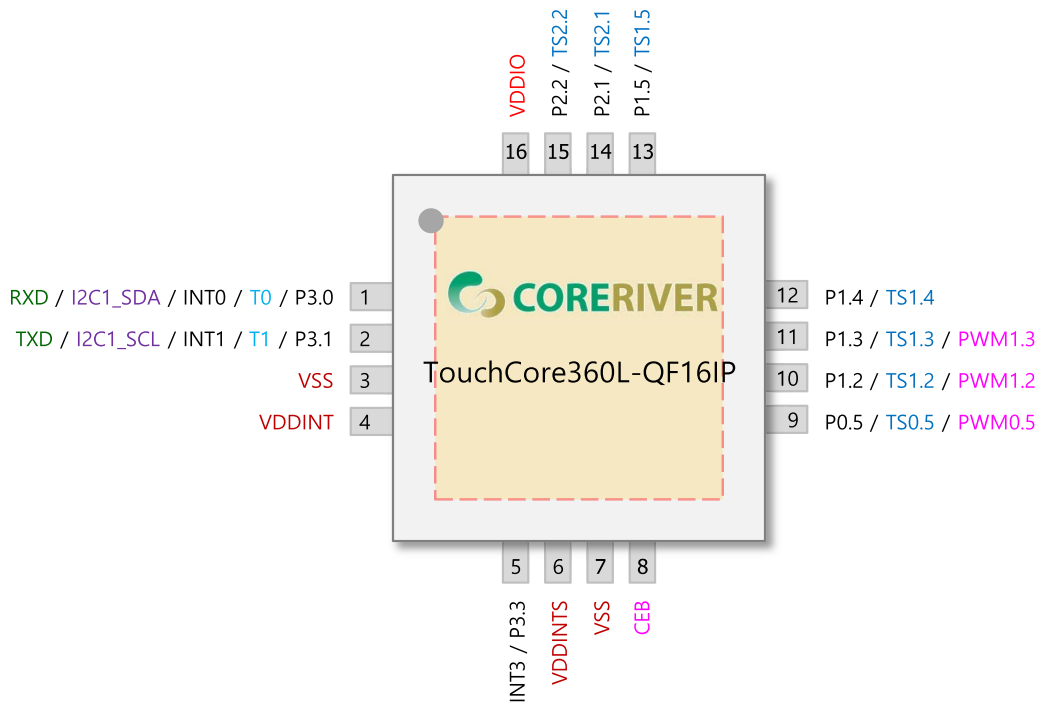

16-pin QFN Package Diagram

## 4 Pin Description

Pin No.	Name	Type	Description	Share Pins
1	P3.0	I/O	General I/O Port 3.0	RXD / I2C1_SDA / INT0 / T0
2	P3.1	I/O	General I/O Port 3.1	TXD / I2C1_SCL / INT1 / T1
3	VSS	GND		
4	VDDINT	O	Digital Power Filter ( +1.8V )	
5	P3.3	I/O	General I/O Port 3.3	INT3
6	VDDINTS	O	Touch Sensor Power Filter	
7	VSS	GND		
8	CEB	Input	Chip Enable ( Active Low )	
9	TS0.5	I/O	Touch Sensing Channel 0.5	P0.5 / PWM0.5
10	TS1.2	I/O	Touch Sensing Channel 1.2	P1.2 / PWM1.2
11	TS1.3	I/O	Touch Sensing Channel 1.3	P1.3 / PWM1.3
12	TS1.4	I/O	Touch Sensing Channel 1.4	P1.4
13	TS1.5	I/O	Touch Sensing Channel 1.5	P1.5
14	TS2.1	I/O	Touch Sensing Channel 2.1	P2.1
15	TS2.2	I/O	Touch Sensing Channel 2.2	P2.2
16	VDDIO	PWR		

## 5 Absolute Maximum Ratings

Item	Conditions	Range
Voltage on any pin relative to Ground	-	-0.5 V to ( $V_{DDIO}+0.5V$ )
Voltage in $V_{DD}$ relative to Ground	-	-0.5V to 3.6V
Output Voltage	-	-0.5 V to ( $V_{DDIO}+0.5V$ )
Output Current High	One I/O pin active	-25mA
	All I/O pin active	-100mA
Output Current Low	One I/O pin active	+30mA
	All I/O pin active	+150mA
Storage Temperature	-	-65 °C to +150 °C
Soldering Temperature	-	260°C, 10 seconds within 5°C of actual peak temperature



## 6 DC Characteristics


\*  $T_A = -40^{\circ}\text{C} \sim +125^{\circ}\text{C}$ ,  $V_{DD} = 1.8\text{V} \sim 3.6\text{V}$  unless otherwise specified

Parameter	Symbol	Pin	Conditions	Value			Unit
				Min.	Typ.	Max.	
Input Low Voltage	$V_{IL}$	P0,P1,P2,P3	$V_{DDIO} = 1.8\text{V} \sim 3.6\text{V}$	-0.5	-	$0.2V_{DDIO} - 0.1$	V
Input high Voltage	$V_{IH}$	P0,P1,P2,P3	$V_{DDIO} = 1.8\text{V} \sim 3.6\text{V}$	$0.2V_{DDIO} + 1.0$	-	$V_{DDIO} + 0.5$	V
Output Low Voltage	$V_{OL}$	P0,P1,P2,P3	$V_{DDIO} = 3.0\text{V} \sim 3.6\text{V}$ ( $I_{OL} = 4.35\text{mA}$ ) $V_{DDIO} = 1.8\text{V} \sim 3.0\text{V}$ ( $I_{OL} = 3.55\text{mA}$ )	-	-	$0.3V_{DDIO}$	V
		P0,P1,P2,P3[1:0] (High Drive)	$V_{DDIO} = 3.0\text{V} \sim 3.6\text{V}$ ( $I_{OL} = 34.79\text{mA}$ ) $V_{DDIO} = 1.8\text{V} \sim 3.0\text{V}$ ( $I_{OL} = 28.41\text{mA}$ )	-	-	$0.3V_{DDIO}$	V
Output High Voltage	$V_{OH}$	P0,P1,P2,P3	$V_{DDIO} = 3.0\text{V} \sim 3.6\text{V}$ ( $I_{OL} = -8.04\text{mA}$ ) $V_{DDIO} = 1.8\text{V} \sim 3.0\text{V}$ ( $I_{OL} = -6.62\text{mA}$ )	$0.7V_{DDIO}$	-	-	V
	$V_{OHP}$	P0,P1,P2,P3 (Pull-up Resistor Only)	$V_{DDIO} = 3.0\text{V} \sim 3.6\text{V}$ ( $I_{OL} = -30.30\mu\text{A}$ ) $V_{DDIO} = 1.8\text{V} \sim 3.0\text{V}$ ( $I_{OL} = -24.26\mu\text{A}$ )	$0.7V_{DDIO}$	-	-	V
Logical 1 to 0 Transition Current	$I_{TL}$	P0,P1,P2,P3	$V_{DD} = 3.0\text{V} \pm 10\%$ ( $V_{IN} = 2\text{V}$ )	-	-	-650	$\mu\text{A}$
Input Leakage Current	$I_{IL}$	P0,P1,P2,P3	$V_{IN} = V_{IH}$ or $V_{IL}$	-	-	$\pm 1$	$\mu\text{A}$
Pin Capacitance	$C_{IO}$	All	$V_{DDIO} = 3.0\text{V}$	-	10	-	pF


## 7 AC Characteristics

\*  $T_A = -40\text{ }^\circ\text{C} \sim +125\text{ }^\circ\text{C}$ ,  $V_{DD} = 1.8\text{V} \sim 3.6\text{V}$  unless otherwise specified


Parameter	Symbol	Pin	Conditions	Value			Unit
				Min	Typ	Max	
RESETB Input Width	$t_{RST}$	RESETB	$V_{DD} = 3\text{V} \pm 10\%$	24	-	-	F <sub>sys</sub>
External Interrupt Input Width	$t_{INT}$	External Interrupt	$V_{DD} = 3\text{V} \pm 10\%$	4	-	-	F <sub>sys</sub>

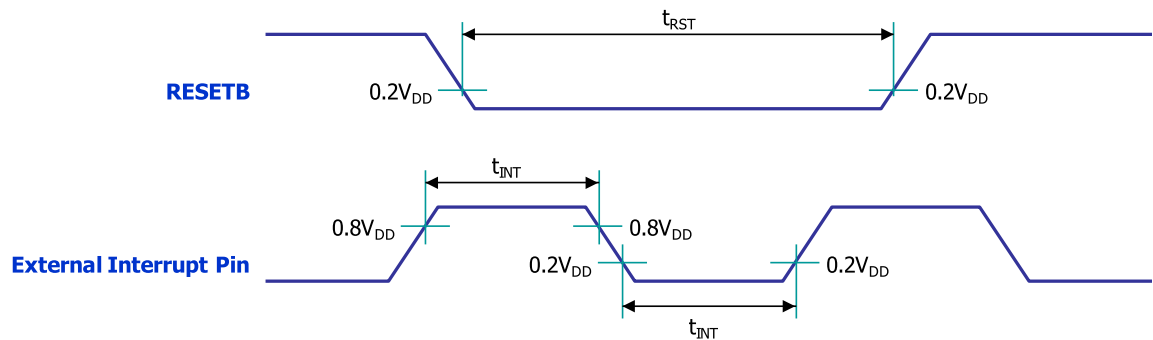

## 8 I2C Timing Characteristics

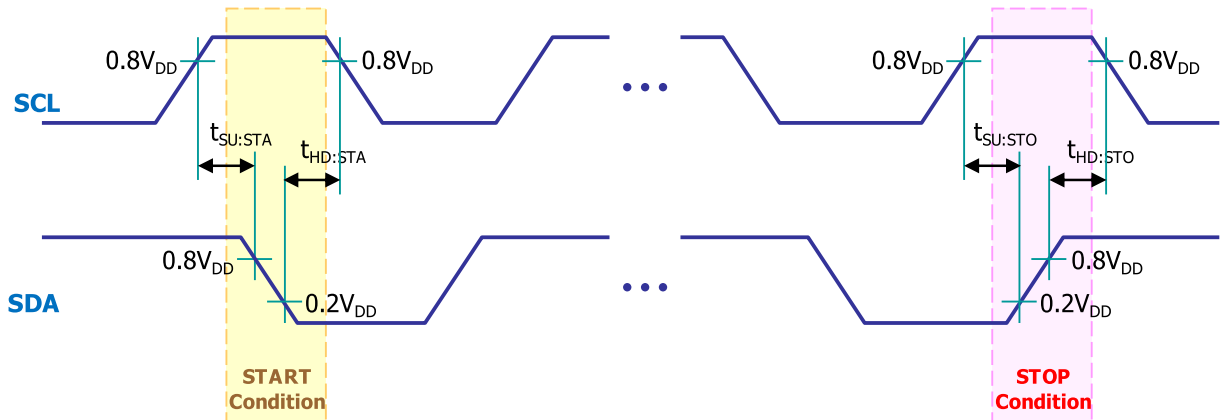

Symbol	Characteristics		Min. [ns]	Max. [ns]	Conditions
$t_{SU:STA}$	START Condition Setup Time	100kHz Mode	4,700	-	Only relevant for repeated START condition
		400kHz Mode	600	-	
$t_{HD:STA}$	START Condition Hold Time	100kHz Mode	4,700	-	After this period, the first clock pulse is generated
		400kHz Mode	600	-	
$t_{SU:STO}$	STOP Condition Setup Time	100kHz Mode	4,700	-	
		400kHz Mode	600	-	
$t_{HD:STO}$	STOP Condition Hold Time	100kHz Mode	4,700	-	
		400kHz Mode	600	-	

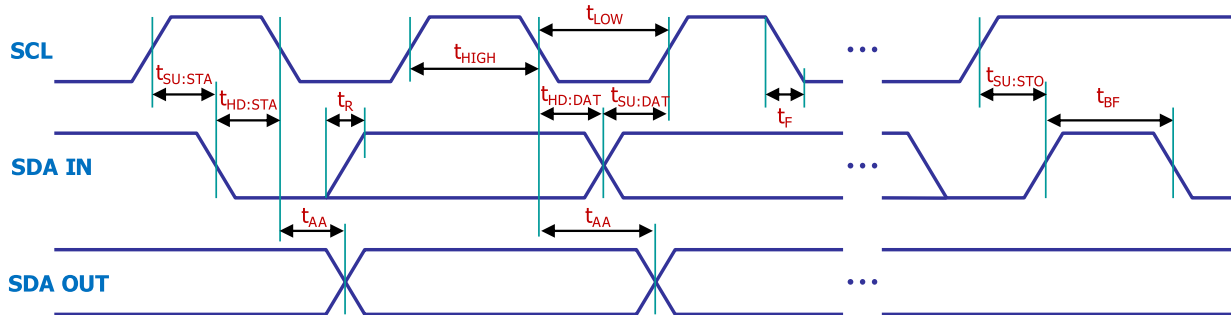

Symbol	Characteristics	Min. [ns]	Max. [ns]	Conditions	
$t_{HIGH}$	Clock High Time	100kHz Mode	4,000	-	Minimum Frequency : 1MHz
		400kHz Mode	600	-	Minimum Frequency : 5MHz
$t_{LOW}$	Clock Low Time	100kHz Mode	4,700	-	Minimum Frequency : 1MHz
		400kHz Mode	1,300	-	Minimum Frequency : 5MHz
$t_{SU:DAT}$	Data Input Setup Time	100kHz Mode	250	-	
		400kHz Mode	100	-	
$t_{HD:DAT}$	Data Input Hold Time	100kHz Mode	0	-	
		400kHz Mode	0	900	
$t_{AA}$	Data Valid from Clock	100kHz Mode	-	3,500	
		400kHz Mode	-	-	
$t_{BF}$	BUS Free Time	100kHz Mode	4,700	-	
		400kHz Mode	1,300	-	
$t_R$	SDA & SCL Rising Time	100kHz Mode	-	1,000	The Range of Cb is from 10pF to 400pF
		400kHz Mode	$2.0 + 0.1C_b$	300	
$t_F$	SDA & SCL Falling Time	100kHz Mode	-	300	The Range of Cb is from 10pF to 400pF
		400kHz Mode	$2.0 + 0.1C_b$	300	



# TC360L – QF16IP


Body Size : 3mm x 3mm

>>VDDIO [ Operating Voltage ] : +1.8V to +3.6V


→ If you use the VDDIO level to 1.8V, you'll need to connect the VDDIO and VDDINT.

\* C3, C4 : Mandatory  
Power Noise filter Cap  
C3 : 0.1uF  
C4 : 2.2uF

\* R1 ~ R7 : Option  
ESD Countermeasure  
Value : 0 ~ 3K [ ohm ]

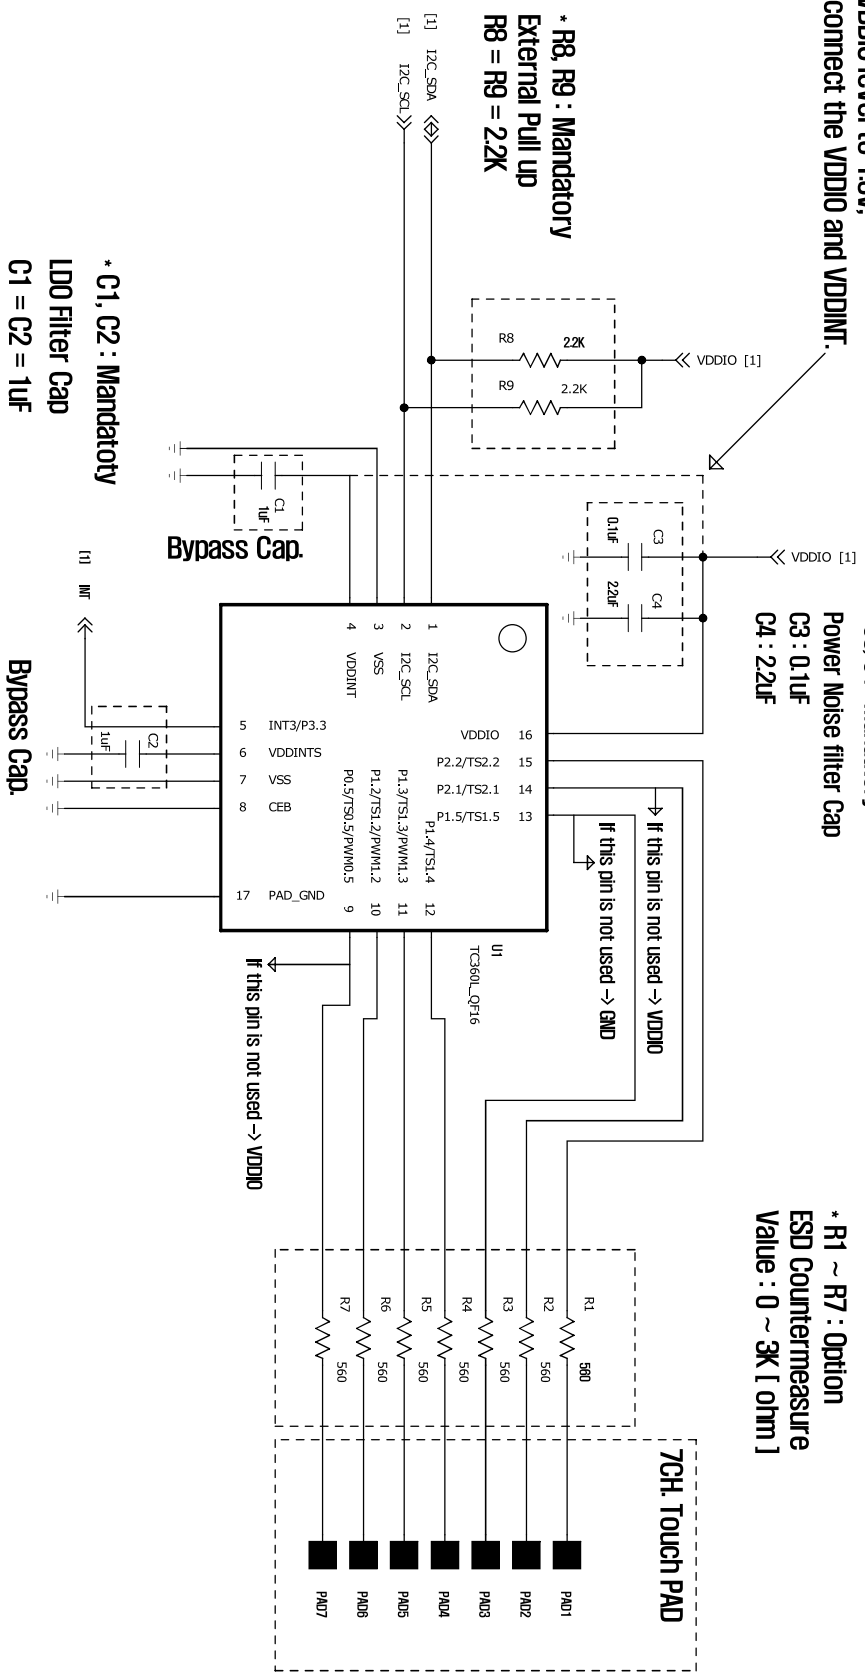

External interface  
ISP Download

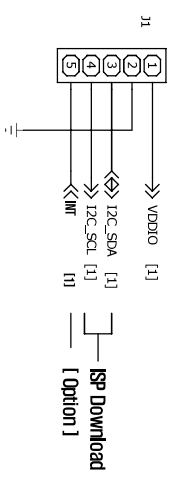

NO.	REVISION NO.	NO.	REVISION NO.	C	B	A	QUANTITY	NO.	PART NO.	DESCRIPTION	MATERIAL	COLOR	FINISH	NOTE									
1																							
2																							
<table border="1"> <thead> <tr> <th>SCALE</th> <th>UNIT</th> <th>DRAWING</th> <th>DATE</th> <th>REVISION</th> </tr> </thead> <tbody> <tr> <td>A3</td> <td>mm</td> <td></td> <td>2014-12-10</td> <td></td> </tr> </tbody> </table>														SCALE	UNIT	DRAWING	DATE	REVISION	A3	mm		2014-12-10	
SCALE	UNIT	DRAWING	DATE	REVISION																			
A3	mm		2014-12-10																				
<p>SHEET 1 / 1</p> <p>CORREVER</p>																							